



Cream White 14021





Light Tan 14022





Vintage Natural 14023











PLANK

14 mm

Dimensions (mm) 1900 (L) x 190 (W) x 14 (T)

Light Tan 14022




Honey Brown 14024









Classic Oak

Black Forest

14032

14029

























Lime Wash 14031

Oak Latte

14028





































PLANK 15 mm

Dimensions (mm) 1900 (L) x 190 (W) x 15 (T)





Midnight Grey



Pre-finished & ready to walk on

Our Timber Floors are ready to walk on immediately after installation, no additional coats are required







Midnight Grey





Natural Limed 1002





Raw Neutral 1043





Smoked Brown 1048





Beige Ash 1049











Moss Grey 1062





3001









Tinge Clay 3005

Raw Neutral

Additional Surface Treatments

A refined treatment which creates a discreet brushed effect, accentuating the characteristics of the timber, bringing out the natural structure of the wood grain.



Natural Limed 1002





Smoked Brown 1048





Coral Sand 1051

1059







Raw Neutral 1043





15mm 20mm 15mm 15mm





Sound Reduction

Our collection works perfectly with Pro-Insul Acoustic Underlay and creates a feeling of calm throughout your home.

PLANK

Dimensions (mm) **2200** (L) x **220** (W) x **20** (T)

20 mm



Parquet Patterns

Available in matching herringbone and chevron patterns. We have the right format for all styles





Beige Ash 1049











Casper White 3003











HERRINGBONE

15 mm

Dimensions (mm) 600 (L) x 120 (W) x 15 (T)







Natural Limed 1002





Raw Neutral 1043







Beige Ash 1049



Low Maintenance

Our micro-bevels and lightly brushed texture not only looks elegantly natural but also prevents dirt entrapment, resulting in a floor that is both beautiful and conveniently low maintenance.

Raw Neutral





Coral Sand 1051









Midnight Grey



















Natural Limed

Smoked Brown


1051

1002






Beige Ash 1049

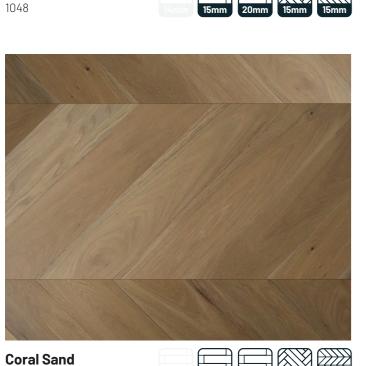



15mm 20mm 15mm 15mm **Raw Neutral** 1043



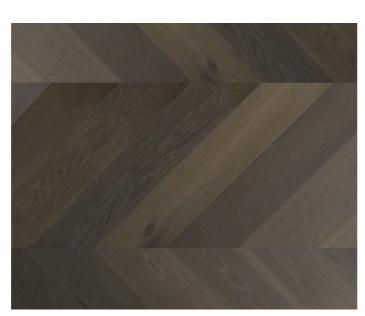







CHEVRON 15 mm

Dimensions (mm) **770** (L) x **125** (W) x **15** (T)

Coral Sand



Matching Accessories

Stair nosings made from our flooring are available in matching colors to achieve easy and cohesive interiors.



Beige Ash

Engineered Construction

Greater stability without the risk of cupping and warping.



Sustainably Certified

FSC certified, meaning it is ethically sourced from sustainably managed forests.



SPECS = = =









		Plank 14mm	Plank 15mm	Plank 20mm	Herringbone	Chevron
Dimension (mm)	Length	1900	1900	2200	600	770
	Width	190	190	220	120	125
	Total Thickness	14	15	20	15	15
	Wear Layer	2	3	6	3	3
Supplied	Pack Size	2.888m2	2.888m2	1.936m2	1.152m2	1.54m2
		8 Planks	8 Planks	4 Planks	16 Panels (8 Pane	els for each side)
	Nesting	< 25%	% random short boa	rds	0% random s	short boards
	Weight	26 Kg	26 Kg	27.1 Kg	11 Kg	14.5 Kg
Installation Method	Floating	Yes	Yes	Yes	No	No
	Direct Stick	Yes	Yes	Yes	Yes	Yes
	Nailed Down	Yes	Yes	Yes	Yes	Yes
Timber Species				European Oak		
Base		Hardwood Multi-layer Plywood				
Joining Profile		Tongue and Groove				
Surface Finish		Brushed Lacquer Matt Finish				
Edging		4 Sided Micro-Bevel				
Timber Grade		Natural Prime				
Underfloor Heating				Yes		
Moisture Content				8-12%		
Gloss Level				5-8% Super Matt		
Slip Resistance		P3	P3	P2	-	-
Warranty	Residential Wear			20 Years		
	Commercial Wear			By Request		
	Structual			Lifetime		





Foam
Green
50m ² and 20m ²
2mm
1 meter
Yes
Yes

TEST RESULTS			
System Tested	L'nTw	FIIC	AAAC Rating
12mm Laminate	44	61	5 Star
14mm Engineered	43	65	5 Star
15mm Engineered	42	63	5 Star
20mm Engineered	43	62	5 Star



4mm Rubber	
Туре	Rubber
Color	Multicolor
Sheet Size	1m x 1m; 1 m²/Sheet
Thickness	4mm
Weight	3.5kg/Sheet
Density	970kg/m³
Surface	Granular Texture

TEST RESULTS				
System Tested	L'nTw	FIIC	AAAC Rating	
12mm Laminate	44	61	5 Star	
14mm Engineered	43	65	5 Star	
15mm Engineered	42	61	5 Star	
20mm Engineered	44	61	5 Star	



ACCESSORIESStair Nosing

Custom Options

Description	Finish	Dimensions
Open Staircase with wrapped edge		Customized Only
Stair Nosing with Brass Bar	Matched Color	Customized Only
Stair Tread - Solid Timber		Customized Only

14mm & 15mm Timber

Description	Finish	Dimensions
Stair Nosing at 90° No Overhang	Matchad Calor	Length 1900mm Tread 125mm Riser 40mm
Stair Nosing with Overhang by 25mm	Matched Color	Length 1900mm Tread 125mm Riser 28/30mm

20mm Timber

Description	Finish	Dimensions
Stair Nosing at 90° No Overhang	Matchad Calor	Length 2200mm Tread 125mm Riser 40mm
Stair Nosing with Overhang by 25mm	Matched Color	Length 2200mm Tread 125mm Riser 40mm



Stair Tread




Stair Nosing with Brass Bar



90° - No Overhang



Overhang by 25mm

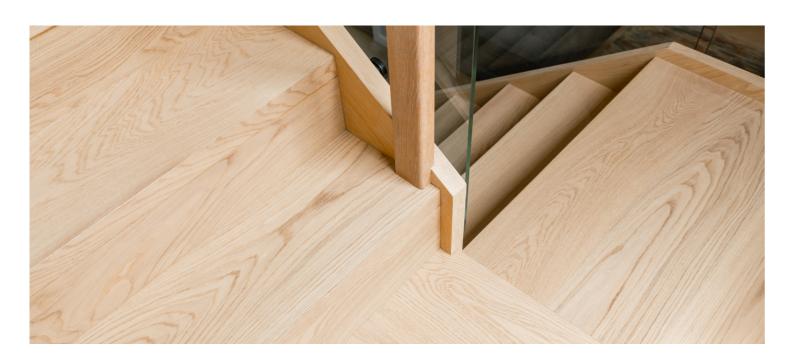

CARE AND MAINTENANCE

Wonderwood Timber Flooring is a quality product, simply take some precautions and follow the regular cleaning and maintenance routines, your floor will stay wonderful from time to time. Please find full instructions on the Wonderwood website, which includes the following:

- Routine Maintenance
- Preventative Maintenace
- Prevening scratches & dents
- Preventing discoloration
- Preventing expansion & shrinkage
- Fixing dings & scratches
- Common Characteristics of Timber Floors



INSTALLATION GUIDELINES

Wonderwood Timber Flooring is designed to be installed by secret nailed, direct adhesive fixing (glue down) or as a floated floor. Please inspect each board in optimal lighting for visual defect and locking system is proper functioning before and during installation. Products are considered of acceptable quality and

structure once installed, do not install if in doubt. Please note that only direct adhesive fixing system is suitable for Herringbone or Chevron parquetry installation. Heavy and bulky objects, such as island bench, should not be placed on floating floors, Wonderwood Timber Flooring must be cut in and installed around such objects. 8% to 10% of wastage floors is recommended to cover any sorting, trimming or visual selection during installation. 20% of wastage floors is expected for Herringbone or Chevron parquetry.

Timber Flooring Facts and Variation

Wonderwood Timber Flooring are made from natural materials and differ in colour, texture and naturally occurring features within and between individual pieces and batches of the same species. Sample, reproductions in printing and photography are only for guidance; they provide a colour indication but are not necessarily representative of the overall effect or design. Please be cautious when making your selection from a single sample, reproductions in printing and photography, as these are only an indication. Timber flooring products will vary from board to board, job to job, and from the samples on display in all jobs supplied. The colour of your flooring may change over time as a result of UV light and oxygen exposure. Minor splits and wood checks/cracks are naturally occurrences in timber. Timber flooring products continue to absorb and release moisture, expand and contract over their lifetime depending on local conditions, environmental

conditions, and weather changes.

Even with proper installation, slight expansion and contraction, as well as board separation, is normal; however, excessive movement due to extreme weather conditions is to be expected. It is critical to be aware of and to check conditions to ensure that your floor performs within tolerances. Installing your timber floor according to Wonderwood Floors installation guideline is crucial for a high-performing floor.

Timber Flooring Moisture Content

Before installation, a moisture meter must be equipped to ensure the moisture content of Wonderwood Timber Flooring remains in about 8%-12% on average, as timber floor is a natural product, a significant change of moisture content may result in product distortion. Please find full guidelines on the Wonderwood website, which includes the following:

- Preparation
- Installation
- Floating Method
- Direct Adhesive Method
- Finishing Molding

WARRANTY TERMS & CONDITIONS

All Wonderwood Timber Flooring comes with a Warranty from the date of purchase in accordance. Please find full descriptions of the following on the Wonderwood website:

- Residental Wear Warranty
- Lifetime Structure Warranty
- General Conditions
- Timber Flooring Facts & Variations
- Australian Consumer Law
- Making a Claim

\\WONDERWOOD FLOORS





Website:

www.wonderwoodfloors.com.au

Tel:

02 9090 2810

Email:

info@aventinogroup.com



T&Cs: Colour and grain of product image in this brochure may differ from the actual product due to colour variation in the printing process. All product purchases are subject to Wonderwood Floors standard terms and conditions of sale. Please refer to our installation guideline, maintenance and warranty document for further clarification. Our products come with guarantees that cannot be excluded under the Australian Consumer Law, Consumers are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. Consumers are also entitled to have the goods repaired or replaced if goods fail to be of acceptable quality. Please refer to our warranties on **www.wonderwoodfloors.com.au**